


EN Mounting set for installation rack with concrete elements

EN Mounting set for installation rack with concrete elements

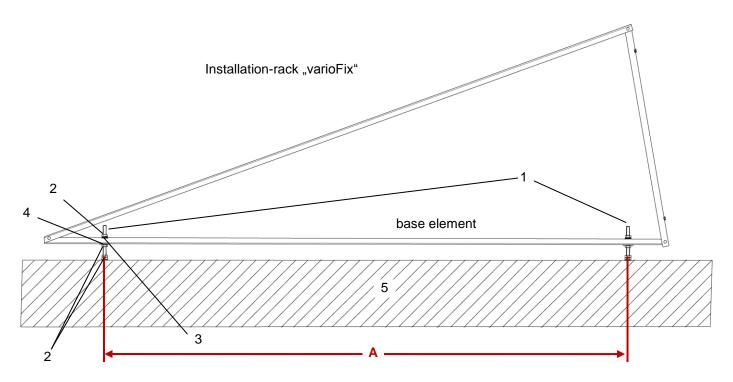


Installation-rack with concrete element (5) and studding (1) on a robust sustainable basement / ground

The installation-rack has to be fixed - at the provided holes on the base element using 2 studdings M12 (1) as well as the appropriate accessories (2, 3, 4) - on the concrete element. The distance (A) on the concrete block heavy (280 kg) measures by default 190 cm, for the concrete block lightweight (185 kg) normally 87 cm.

The concrete element has to be placed on solid ground and the load must be proofed statically !

ATTENTION!

All bolts and nuts for weight-bearing connections have to be tightened with a calibrated torque handle. The torque table can be found in the "Safety and installation manual for flat plate collectors".



Pos.	Code	Designation	Per set. 40062
1	29141	Studding M12x1000 DIN 976 - A2	0.5
2	29277	Nut with flange M12 DIN 6923 - A2	6
3	29211	Washer M12 – 13.0 mm DIN 125 - A2	2
4	29222	Washer 13.0 mm DIN 9021 - A2	2
Accessorie: order separately !			
5	40092	Concrete element, heavy - 280 kg (230x25x20 cm)	1
	40093	Concrete element, light - 185 kg (150x25x20 cm)	1

Current status 11/10/2017. Rights to errors and technical alterations reserved!